



TRANSMITTAL FORM <i>(to be used for all correspondence after initial filing)</i>		Application Number	10/618,430
		Filing Date	July 10, 2003
		First Named Inventor	Looman, Lambertus B G
		Art Unit	Not Yet Assigned
		Examiner Name	Not Yet Assigned
Total Number of Pages in This Submission	11	Attorney Docket Number	089990-000000US

ENCLOSURES (Check all that apply)		
<input type="checkbox"/> Fee Transmittal Form <input type="checkbox"/> Fee Attached <input type="checkbox"/> Amendment/Reply <input type="checkbox"/> After Final <input type="checkbox"/> Affidavits/declaration(s) <input type="checkbox"/> Extension of Time Request <input type="checkbox"/> Express Abandonment Request <input type="checkbox"/> Information Disclosure Statement <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) <input type="checkbox"/> Response to Missing Parts/ Incomplete Application <input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53	<input type="checkbox"/> Drawing(s) <input type="checkbox"/> Licensing-related Papers <input type="checkbox"/> Petition <input type="checkbox"/> Petition to Convert to a Provisional Application <input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address <input type="checkbox"/> Terminal Disclaimer <input type="checkbox"/> Request for Refund <input type="checkbox"/> CD, Number of CD(s)	<input type="checkbox"/> After Allowance Communication to Group <input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences <input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief) <input type="checkbox"/> Proprietary Information <input type="checkbox"/> Status Letter <input checked="" type="checkbox"/> Other Enclosure(s) (please identify below): Return Postcard
Remarks		The Commissioner is authorized to charge any additional fees to Deposit Account 20-1430.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual	Townsend and Townsend and Crew LLP Joe Liebeschuetz Reg. No. 37,505
Signature	<i>J. Liebeschuetz</i>
Date	November 4, 2003

CERTIFICATE OF TRANSMISSION/MAILING			
I hereby certify that this correspondence is being facsimile transmitted to the USPTO or deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below.			
Typed or printed name	Kristi Coplin		
Signature	<i>Kristi Coplin</i>	Date	November 4, 2003





**Eur päisches
Patentamt**

**Eur pean
Patent Office**

**Office eur péen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02077787.6

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02077787.6
Demande no:

Anmeldetag:
Date of filing: 10.07.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Winterwarm B.V.
Industrieweg 8
7102 DZ Winterswijk
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Arrangement of burner and heat exchanger, and air-heating apparatus

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

F24H3/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Arrangement of burner and heat exchanger, and air-heating apparatus

Field of the invention

The present invention relates to an arrangement of a burner and heat exchanger as defined in the preamble of claim 1. Also, the invention relates to an air-heating apparatus comprising such an arrangement of a burner and heat exchanger. Further, the invention relates to a method for such an air-heating apparatus.

Prior art

Air-heating apparatuses are well known in the art for heating of large spaces such as storage warehouses and workshops. In such an air-heating apparatus a burner section and a heat exchanger section are separately present.

The burner section is used as energy source and provides energy in the form of heated matter at its outlet to the heat exchanger section. The heated matter may be an exhaust gas or a fluid: most systems known in the art are gas-fired air heating apparatuses that use a gas burner device to burn a primary fuel gas (e.g., natural gas) and to produce high temperature exhaust gas as energy source.

In the heat exchanger section of gas-fired air-heating apparatuses the energy content of the high temperature exhaust gas is used to heat a secondary gas (i.e., room air or process air) which is to be distributed in the space to be heated. The heat exchanger section consists of heat exchanger elements through which the high temperature exhaust gas is guided internally and where heat exchange between the high temperature exhaust gas and the process air takes place at the outer surface of those heat exchange elements. The process air may be forced by a blower to flow across the outer surface of the heat exchanger elements to enhance the exchange of heat.

In relation to energy conservation and reduction of energy costs, the efficiency of air-heating apparatuses from the prior art may be regarded low. Mainly for historical reasons, the maximum temperature in the heat exchanging section is typically limited to about 450°C. Therefore the heat flux (heat flow per unit area) of an air-heating unit is low. To obtain a sufficiently large heat flow for adequate heating, the heat exchanger area of an air-heating unit must be large and consequently air-heating units from the prior art are relatively bulky. The actual flow needed relates to the size of the space to be heated and depends on the actual capacity of the air-heating apparatus. (In some

cases more than one air-heating apparatus may be required in a particular space.) Disadvantageously, due to their bulky size, air-heating apparatuses reduce the useful floor (or wall) capacity of storage warehouses and the like.

Summary of the invention

5 It is an object of the present invention to provide an air-heating apparatus that has better energy efficiency than air-heating systems from the prior art.

Therefore, the present invention relates to an arrangement of a burner and heat exchanger as defined in the preamble of claim 1, **characterised in that** the heat exchanger is constructed from a high temperature material to allow, in use,
10 heat transfer to the secondary gas by radiation of the heat exchange elements.

Further, the present invention relates to an air-heating apparatus comprising such an arrangement of a burner and a heat exchanger.

Advantageously, the present invention allows an increase of the surface temperature of the heat exchanger to well above 450°C up to temperatures, e.g., up to
15 1000°C, preferably in the range of 700-800°C, where heat transfer is taking place substantially by radiation. A surface temperature of approx. 750°C may be used in the air-heating apparatus according to the present invention. Due to the higher temperature of the high temperature exhaust gas the efficiency of heat transfer in the heat exchanger is strongly improved.

20 Also, by allowing high temperatures, the heat flux and heat transfer of a heat exchanger is strongly increased. Since the heat transfer is proportional to the cubic of the temperature difference between the incoming primary heat flow (i.e., high temperature exhaust gas) and secondary heat flow (i.e., process air), a two-fold increase of the temperature difference will result in an 8-fold increase of the energy in the
25 outgoing secondary heat flow. As a consequence, for a given capacity of a heat exchanger, the heat exchanger in the air-heating apparatus according to the present invention can have a smaller size than a heat exchanger from the prior art. Advantageously, a more compact air-heating apparatus will need less floor- (or wall-) space than an air-heating apparatus from the prior art.

30 In this respect, high temperature materials may be defined as materials which can withstand exposure to temperatures above 450°C during process time without a significant deterioration of their mechanical, physical and/or chemical properties. By

using high temperature materials for the heat exchanger, the heat exchanger advantageously has improved thermal stability i.e., resistance to e.g., high temperature mechanical failure and high temperature corrosion.

5 In a further preferred embodiment, the position of the burner inside the heat exchanger favours both the increase of the working temperature and the size reduction of the apparatus, due to the fact that the high temperature exhaust gas is generated directly in the heat exchanger.

Brief description of drawings

Below, the invention will be explained with reference to some drawings, which
10 are intended for illustration purposes only and not to limit the scope of protection as defined in the accompanying claims.

Figure 1 shows a cross-sectional view of an arrangement of a burner and a heat exchanger according to the present invention;

Figure 2 shows a perspective view of an arrangement of a burner and a heat
15 exchanger according to the present invention;

Figure 3 shows a perspective view of the burner and heat exchanger arrangement in a further embodiment.

Description of preferred embodiments

Figure 1 shows a cross-sectional view of an arrangement of a burner and a heat
20 exchanger according to the present invention. The arrangement comprises a heat exchanger 1 and a burner 2. The heat exchanger 1 consists of a plurality of interconnected heat exchange elements 3 forming a lamellar structure. In this lamellar structure the heat exchange elements 3 have preferably a substantially rectangular shape and are connected gastight to each other with a gap in between two adjacent heat
25 exchange elements 3. The heat exchange elements 3 comprise inlet duct parts 4 and outlet duct parts 5 for connecting to each other. An inlet duct part 4 and outlet duct part 5 are preferably integral parts of an element 3, but also may be separate parts for connection to a heat exchange element 3. In Figure 1 the ducts 4, 5 are shown as tubular parts, but the ducts 4, 5 also may be heightened areas integrated in the heat
30 exchanger element 3.

On one sidewall A of the heat exchanger 1 an end heat exchange element 3' is located which comprises an inlet duct part 4 and an outlet duct part 5 on only one of its sides.

On the opposite sidewall B of the heat exchanger 1, the burner 2 is connected. The burner 2 is a gas-fired burner and is connected to an outer inlet duct part 4' of the heat exchanger 1. Outer inlet duct 4' may be provided with a flange for connecting the burner 2. The burner 2 receives fuel gas at a burner inlet F. A gas outlet H is located on the outer outlet duct part 5'. Outer outlet duct 5' may be provided with a flange for connecting other ducts.

When the burner 2 is in use, the burning process produces high temperature exhaust gas which are directed into the heat exchanger 1. The high temperature exhaust gas flows from the burner 2 through the inlet duct parts 4, the heat exchange elements 3, and the outlet duct parts 5 to the gas outlet H. In Figure 1, the burner 2 is located at the same sidewall B of the heat exchanger 1 as the gas outlet H. It will be appreciated that the gas outlet H may be located at an opposite location H' at sidewall A of the heat exchanger 1.

In the heat exchanger 1 according to the present invention, the flow of process air to be heated is perpendicular to the drawing surface of Figure 1.

Figure 2 shows a perspective view of an arrangement of the burner 2 and the heat exchanger 1 according to the present invention. In Figure 2, entities with the same reference numbers refer to the same entities as shown in Figure 1.

It is known that the larger the temperature difference between the relatively hot heat exchange elements 3 and the relatively cold incoming process air flow, the larger the heat transfer to the process air flow will be. Thus, to enhance the energy efficiency of the heat exchanger 1, increasing the surface temperature of the heat exchange elements 3 relative to the temperature of the incoming secondary gas is required.

Typically, in prior art air-heating apparatuses a surface temperature of approx. 450°C is maintained during use of the apparatus. Most of the heat transfer is achieved at this temperature by convection (heat flow from the outer surface of the heat exchange elements 3 to the process air). To enhance the heat transfer and the heat flow, the surface temperature must be increased. In the present invention, the surface temperature is preferably increased up to roughly 1000 °C, preferably 700 - 800°C.

Actually, at this high temperature, the surface of the heat exchange elements will be hot enough to generate radiation in the visible range of the spectrum. Since the heat transfer is proportional to the cubic of the temperature difference between the incoming primary flow (here the hot surface at e.g., $\sim 750^{\circ}\text{C}$ heated by the high temperature exhaust gas) and incoming secondary heat flow (the process air flow at e.g., $\sim 25^{\circ}\text{C}$), the increase of the temperature difference from 425° to 725° will result in an (almost) 5-fold increase of the energy in the outgoing secondary heat flow.

In the present invention it is recognized that increasing the surface temperature of the heat exchange elements 3 relative to the temperature of the incoming process air can be achieved by locating the burner 2 close to the heat exchanger 1, and by improving the thermal stability of the heat exchanger 1, mechanically, physically, and/or chemically.

In a preferred embodiment of the present invention, the burner 2 is integrated in the heat exchanger 1: The burner 2 is located inside the inlet duct parts 4 and preferably extends over a substantially large part of the length L of the heat exchanger 1.

To improve thermal stability at the high working temperature, the heat exchanger elements 3 are produced from high temperature materials, such as high temperature steels (e.g., a stainless steel) and high temperature alloys, which possess sufficient mechanical strength and corrosion resistance at high temperature.

Furthermore, due to the increase of the energy in the outgoing secondary heat flow (process air heated in the heat exchanger 1), the heat exchanger 1 according to the present invention can be more compact and have smaller dimensions than a heat exchanger from the prior art, for a given heat capacity. Typically, compared to the size of air heating apparatuses from the prior art, an air heating apparatus comprising the arrangement of burner and heat exchanger according to the present invention occupies a volume which is approximately 50 % smaller. As a consequence, less floor space or wall space is needed for placement of an air-heating apparatus according to the present invention.

The burner 2 in the arrangement of the present invention is preferably a pressurised gas-fired burner.

The arrangement of burner and heat exchanger is formed in such a way that energy losses of the high temperature exhaust gas during transfer from burner to heat

exchanger are as minimal as possible. In the preferred embodiment, the burner 2 may be integrated in the heat exchanger.

Further, the arrangement of burner and heat exchanger is formed in such a way that a distribution of the heated gas along the direction L of the heat exchanger 1 is obtained that provides a substantially uniform heating of the heat exchange elements 3, i.e., each element 3 has substantially the same temperature during operation.

The burner 2 further may comprise a connector 40 (e.g., a flange) for connecting to the outer inlet duct 4' of the heat exchanger 1.

The burner 2 shown here is a pressurised gas-fired burner. It is noted that the burner may also be a burner for use at atmospheric pressure.

Also, the burner 2 may be arranged as a modulating burner, with a modulation proportional to a given temperature difference between e.g. a measured process air temperature and a temperature set-point.

It is noted that various types and shapes of the burner (e.g. a rod-shaped burner element) may be used in accordance with the present invention.

In the burner and heat exchanger arrangement of the present invention, a further improvement of the energy efficiency is obtained by extended cooling of the heated gas in the heat exchanger elements 3 from initially approx. 1000 °C to well below 100 °C by providing a large flow of process air through the heat exchanger 1.

To this extent, the width of the heat exchanger elements 3 is small relative to the width of the gap in between adjacent heat exchange elements 3. A heat exchanger 1 according to the present invention may comprise heat exchanger elements 3 having for example a height of 35 cm, a depth of 25 cm, and width of approx. 1 cm. In the present invention, the ratio of the element width and the gap width is substantially larger than 1:1, preferably, 1:3 or more.

Figure 3 shows a perspective view of the burner and heat exchanger arrangement in a further embodiment. In Figure 3, entities with the same reference numbers refer to the same entities as shown in the preceding figures.

In the further embodiment of Figure 3, the burner and heat exchanger arrangement comprise an additional condensation unit CU located at the gas outlet H. Advantageously, the condensation unit CU further increases the energy efficiency of the burner and heat exchanger arrangement by condensation of moisture from the heated gas.

Finally, it is noted that due to the compact size of an air-heating apparatus according to the present invention, such an air-heater may also be applied as an air curtain at the entrance of e.g., a building. In comparison to prior art air curtains powered electrically or by heated water, an air-heater according to the present invention has the advantage
5 that the overall energy efficiency is higher, since no additional conversion step (to electricity or to heated water) is necessary.

Claims

1. Arrangement of a burner (2) and a heat exchanger (1), said heat exchanger (1) comprising a plurality of heat exchange elements (3) interconnected to each other with intermediate gaps, said heat exchanger (1) being arranged with an inlet (4') and an outlet (5'), said burner (2) being connected at said inlet (4') to said heat exchanger (1) for providing energy to said heat exchanger (1) by burning a fuel gas, said heat exchanger (1) being arranged, in use, for heat transfer from an outer surface of said heat exchange elements (3) to process air as a secondary gas, said burner (2) being arranged to burn said fuel gas inside said heat exchanger (1) characterised in that said heat exchanger (1) is constructed from a high temperature material to allow, in use, heat transfer to said secondary gas by radiation of said heat exchange elements (3).
2. Arrangement according to claim 1, characterised in that said high temperature material comprises a high temperature steel or a high temperature alloy.
3. Arrangement according to claim 1 or 2, characterised in that the ratio of the width of one of said heat exchange elements and the width of one of said intermediate gaps is at least 1:3.
4. Arrangement according to claim 1 or 2 or 3, characterised in that said burner (2) is a pressurised burner.
5. Arrangement according to any one of the preceding claims, characterised in that said burner (2) is a modulating burner.
6. Arrangement according to any one of the preceding claims, characterised in that said burner (2) comprises a burner element, being located inside said heat exchanger (1); said burner element being arranged to provide a preferential direction for transfer of said energy through said heat exchange elements (3).
7. Arrangement according to any one of the preceding claims, characterised in that a condensation unit (CU) is connected at said outlet (5') of said heat exchanger (1).
8. Method to be carried out by an arrangement according to any one of the claims 1 – 7, characterised in that

the method comprises:


- heating, in use, of said outer surface of said heat exchange elements (3) to a high surface temperature to allow heat transfer to said secondary gas by radiation of said heat exchange elements (3).

- 5 9. Method according to claim 8 characterised in that
said high surface temperature is a surface temperature above 450 °C.
10. Method according to claim 9, characterised in that
said surface temperature is in the range of 450 – 1000 °C, preferably in the
range of 700 - 800°C.
- 10 11. Air-heating apparatus comprising an arrangement of a burner (2) and a heat
exchanger (1) according to any one of claims 1 through 7.

Abstract

Arrangement of a burner (2) and a heat exchanger (1), the heat exchanger (1) including a plurality of heat exchange elements (3) interconnected to each other with intermediate gaps, the heat exchanger (1) being arranged with an inlet (4') and an outlet (5'), the burner (2) being connected at the inlet (4') to the heat exchanger (1) for providing energy to the heat exchanger (1) by burning a fuel gas, the heat exchanger (1) being arranged, in use, for heat transfer from an outer surface of the heat exchange elements (3) to process air as a secondary gas, the burner (2) being arranged to burn the fuel gas inside the heat exchanger (1), wherein the heat exchanger (1) is constructed from a high temperature material to allow, in use, heat transfer to the secondary gas by radiation of the heat exchange elements (3).

[Figure 2]

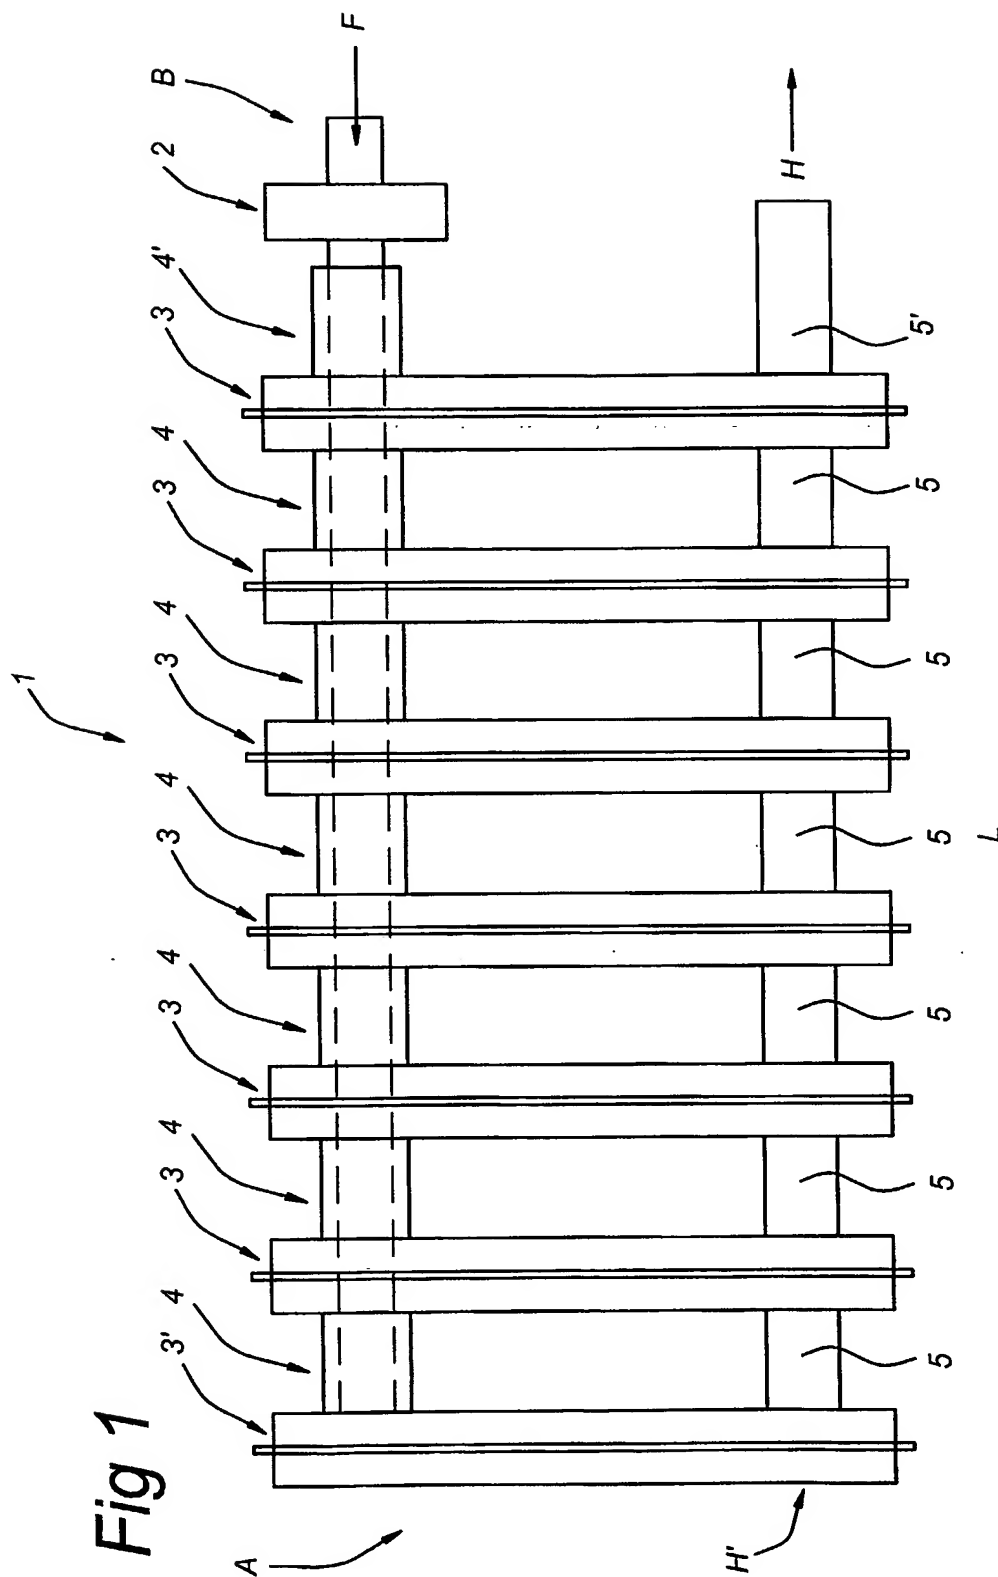

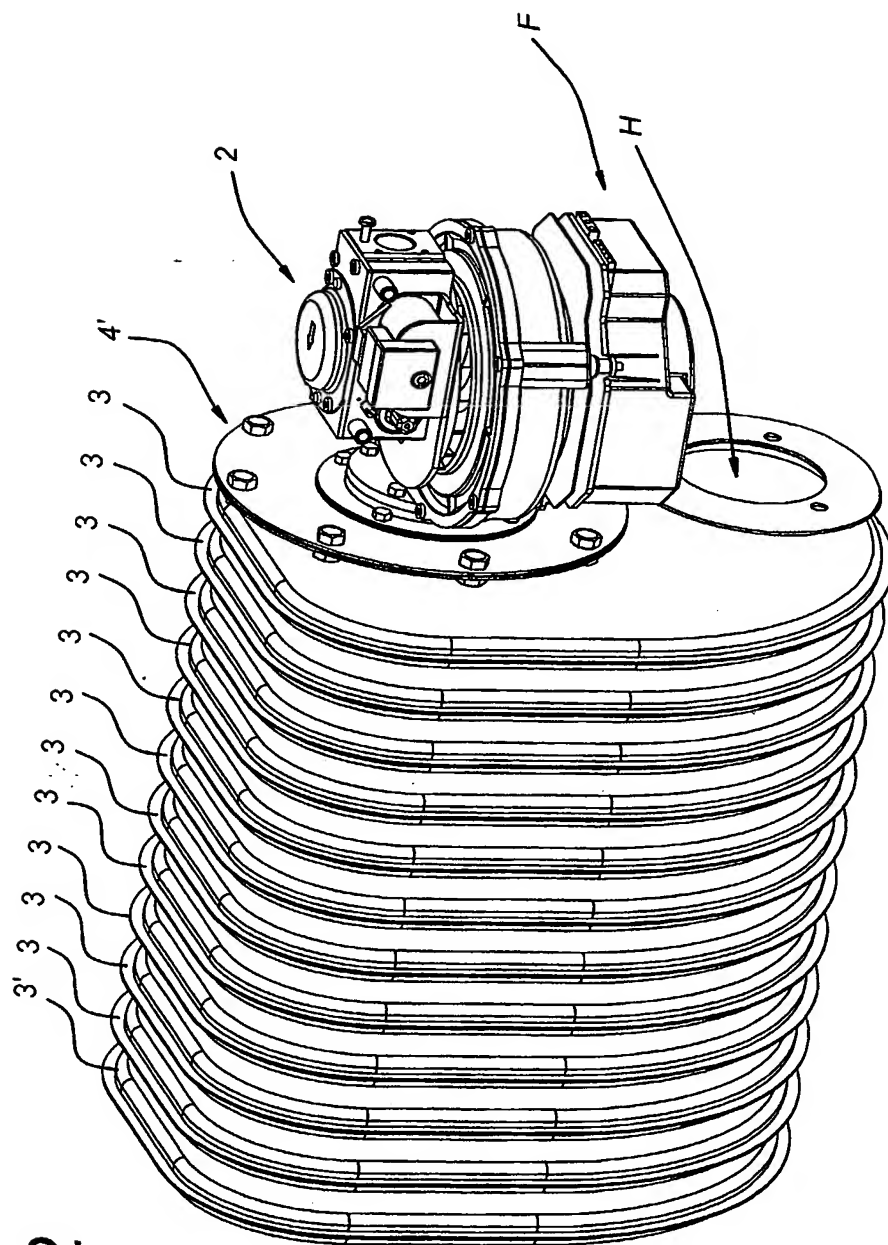


Fig 2

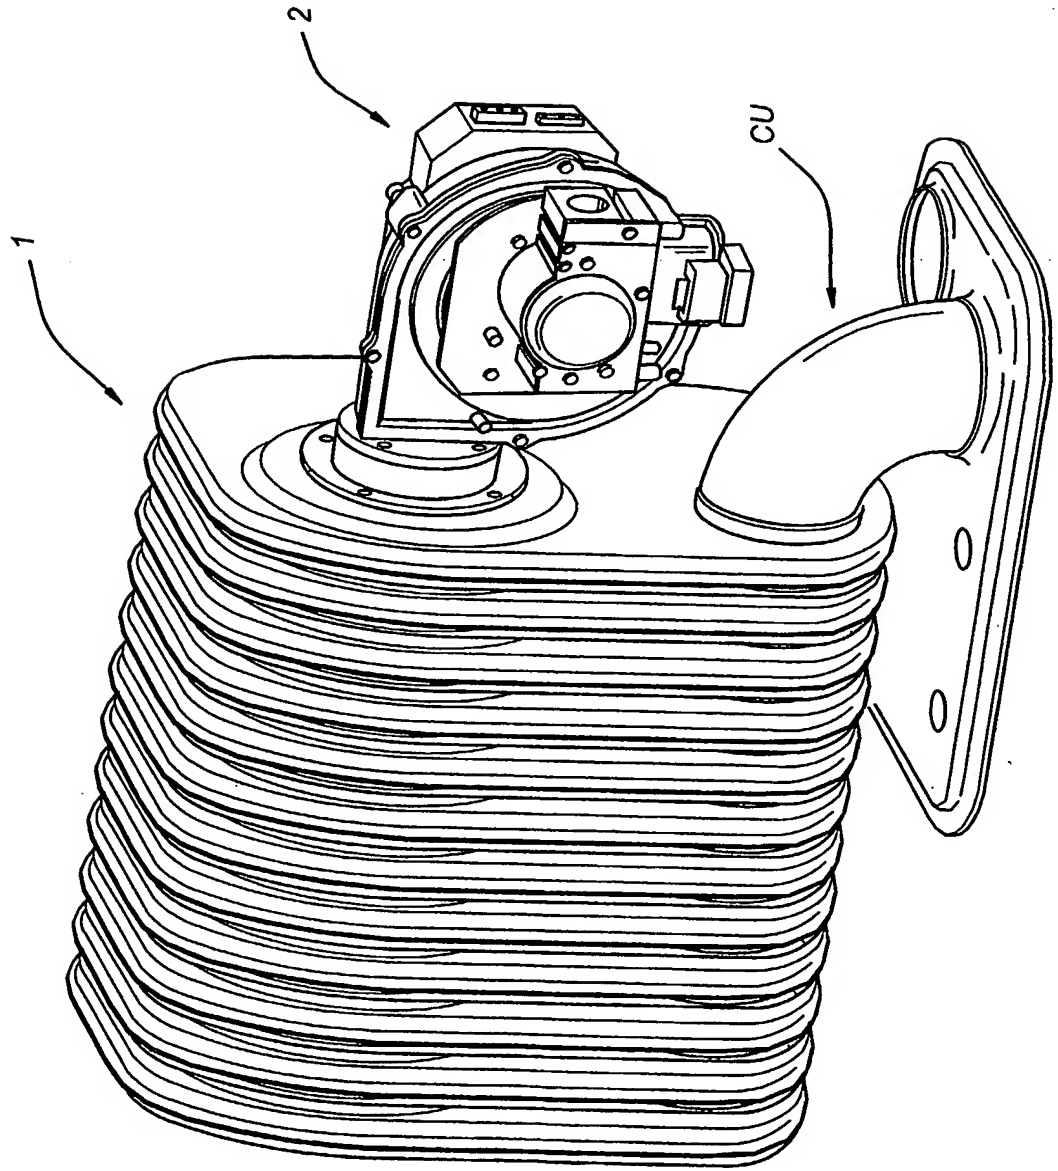


Fig 3

